

4E 4133

4E 4133

B.Tech. IV Semester (Main/Back) Examination, June/July - 2015
Electronics and Communication Engineering
4EC4A Electromagnetic Field Theory

Time : 3 Hours

Maximum Marks : 80
Min. Passing Marks : 26

Instructions to Candidates:

Attempt any five questions, selecting one question from each unit. All questions carry equal marks. (Schematic diagrams must be shown wherever necessary. Any data you feel missing suitably be assumed and stated clearly. Units of quantities used/calculated must be stated clearly.

Unit - I

1. a) Transform the vector $\vec{A} = 4i - 2j - 5k$ into spherical coordinates (4)
- b) If a scalar variable is $\phi = 4x^2yz$ then find the value of
 - i) $\nabla\phi$ and
 - ii) $\nabla \cdot (\nabla\phi)$ (2 × 2=4)
- c) Prove the stokes theorem $\oint A \cdot dl = \int (\nabla \times A) \cdot ds$ Also write the significance it. (8)

OR

1. a) What is the significance of line integral? Find the line integral of a vector $\vec{A} = x^2\hat{a}_x + xy\hat{a}_y$ from point p(0,1,0) to q(2,1,1) (8)
- b) A vector in cylindrical coordinate is given by $\vec{A} = r\cos\phi\hat{a}_r - r\sin\phi\hat{a}_\phi$ then find the value of closed surface integral $\oint A \cdot ds$ over the surface of the box bounded by planes $z=0$ and $z=1$, $\phi = 0$ and $\phi = \frac{\pi}{2}$ and the cylinder $r = 9$ (8)

Unit - II

2. a) State the Coloumb's law in vector form. using it find the coloumb force between to point charge

$$q_1 = 10\mu\text{c at } (2, \frac{\pi}{2}, 2) \text{ and}$$

$$q_2 = -5\mu\text{c at } (0, \frac{\pi}{2}, 4)$$


(6)

- b) Write the limitations of Coloumb's law

(2)

- c) prove that the energy density in electric field is given by


$W_\epsilon = \frac{1}{2} D \cdot E$ if the electric field is given by $\vec{e} = xi + 2j + 2k$ then find the total energy stored in a cube of arm 2 meter placed as in fig-2(i)

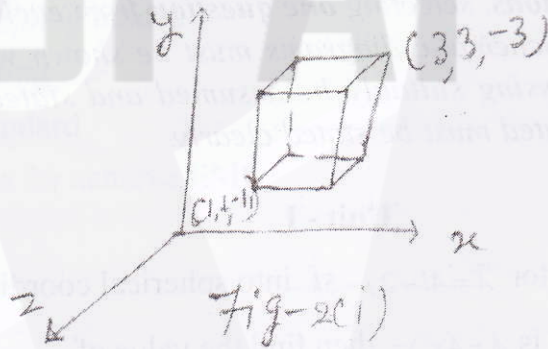

(8)

OR

2. a) State the boundary condition for electric field using boundary condition find the incident field \vec{e}_1 in fig-2(ii)

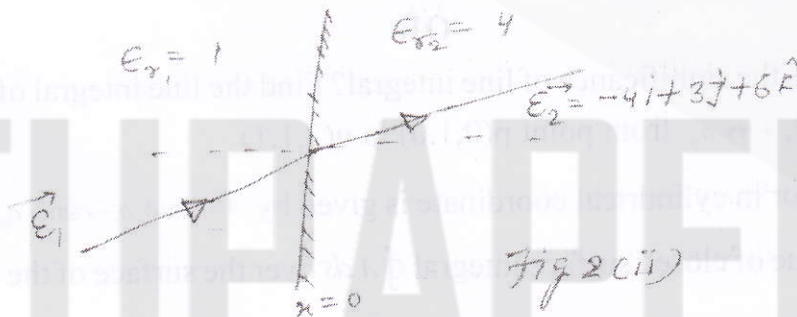

(8)

Assume the boundary interface is charge free

- b) State Laplace-equation and using it find the capacitance for
- Concentric spherical capacitor
 - Cylindrical capacitor (2×4=8)

Unit - III

3. a) Prove the maxwell's third & fourth equation for static magnetic field (2×4=8)
- b) If the magnetic vector potential in spherical coordinate is given by $\vec{A}=10\sin\theta\hat{1}_\theta$ then find the magnetic flux density(B) at $(2,\pi,0)$ and at $(0,\pi/2,0)$ (8)

OR

3. a) If the magnetic field intensity in free space is given by
- $$\vec{H} = \frac{20}{x^2 + y^2} (x\hat{a}_x + y\hat{a}_y) \text{ A/m.}$$
- Then show that
- $\nabla \cdot \vec{B} = 0$ and
 - Find the current density J (8)
- b) Prove that at the interface of two magnetic media of permeability $\mu_1, 2\mu_2$, the
- Normal flux continue and
 - Tangential component of magnetic field intensity is discontinue (8)

Unit - IV

4. a) For a lossy medium having $\mu_r=1$, $E_r=24$ and $\sigma=20 \text{ S/m}$ calculate attenuation constant phase constant and intrinsic impedance at a frequency $f=10\text{GHz}$ (8)
- b) Find the expression for attenuation constant α and phase constant β for
- Good dielectric
 - Perfect insulator
 - Good conductor and
 - Perfect conductor (4×2=8)

OR

4. a) Modify the maxwells equation (8)
- $\nabla \times \vec{E} = 0$ and
 - $\nabla \times \vec{H} = J$
- for a time varying field. Also explain the concept of displacement current

- b) If the electric field of an EM wave propagation in X-direction is given by $\epsilon_y = 1000 \cos \{10^9 t - \beta x\}$ Then find its
- i) Magnetic field
 - ii) Energy flow per unit area per second (8)

Unit - V

5. a) If the current density in a wire is given by $j_2 = 20 \sin \omega t \hat{j}_2$ then find the retarded magnetic potential at a distance r from it (4)
- b) State the radiation conditions and find the radiated power from a current element of length 10m at a frequency whose wavelength is 40m (4)
- c) Explain the shielding and grounding method for avoid interference. (8)

OR

5. Write short notes on any two :

- i) EMI coupling modes
- ii) EMI testing
- iii) EMI standard
- iv) Methods for achieve EMC

(2×8=16)